


GRÄSSLIN

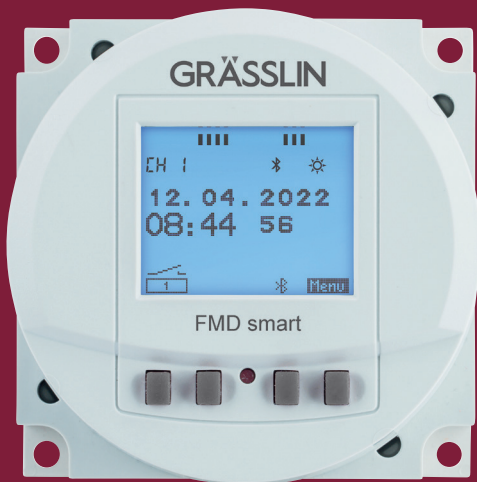

TIME SWITCH MODULES GRASSLIN FM/1 QRTuZH

436000011

The time switch module FMD smart C15 is suitable for installation and provides versatile application options throughout buildings and outdoors. It is used for universal switching tasks such as in switchgears, machine controls, or specific solutions as swimming pool controls and sprinkler systems. The FMD smart is designed for installation in customer-specific switching applications. The device can be operated and programmed via Bluetooth with the talento smart App. Replacement module for Tactic Smart A

SPECIFICATIONS

Operating voltage	110V~230V AC
Frequency	50~60Hz
Switching capacity at 250V AC, cos phi = 1	16A
Switching capacity at 250VAC, cos phi = 0.6	10A
Incandescent/halogen lamp load	2600W
LED load	400W
Ambient temperature	-20°C ~ +55°C
Time accuracy	< ± 0.3s/day at 20°C
Shortest switching time	1min/1sec pulse
Number of channels	1 channel
Power reserve	8 years
Standby output	< 1W
Relay outputs	1
PROG. Functions	Weekly function, yearly function, Astro function, pulse/cycle function
Protection	IP 20

0800 239 239

 www.hamer.co.nz

 **HAMER**

 sales@hamer.co.nz