


DURGT1500

Size: AA (LR6)



Alkaline-Manganese Dioxide Battery

Zn/MnO₂

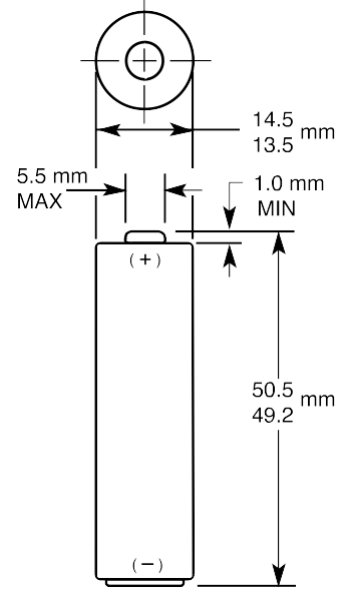

Dimensions shown are IEC standards

Nominal voltage	1.5 V
Impedance	120 m-ohm @ 1 kHz
Typical weight	24 g (0.8 oz)
Typical volume	8.4 cm ³ (0.5 in ³)
Terminals	Flat
Storage temperature range	5°C to 30°C (41°F to 86°F)
Operating temperature range	-20°C to 54°C (-4°F to 130°F)
Designation	ANSI: 15A IEC: LR6

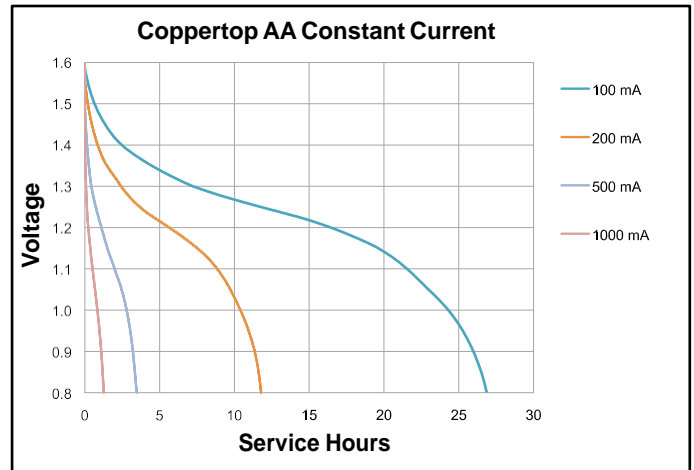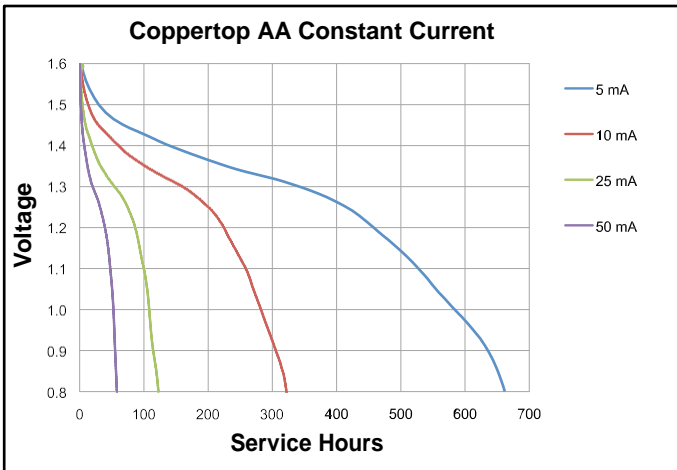

130 Bush Road
 Albany, 0632
 Telephone: 0800 239 239
www.hamer.co.nz

Delivered capacity is dependent on the applied load, operating temperature and cut-off voltage. Please refer to the charts and discharge data shown for examples of the energy/service life that the battery will provide for various load conditions.







DURGT1500

Size: AA (LR6)

Alkaline-Manganese Dioxide Battery

Zn/MnO₂

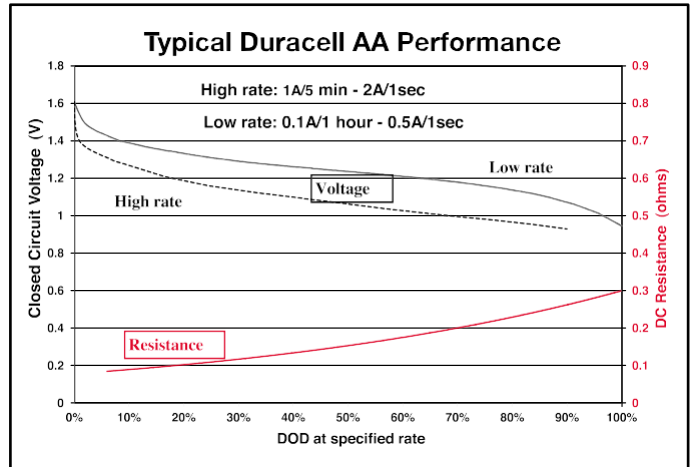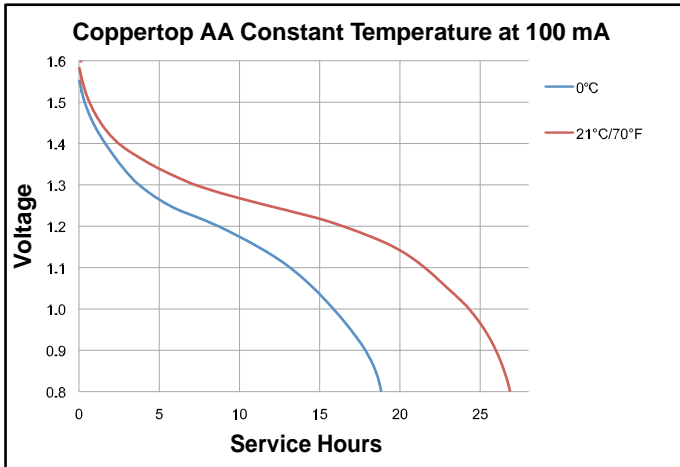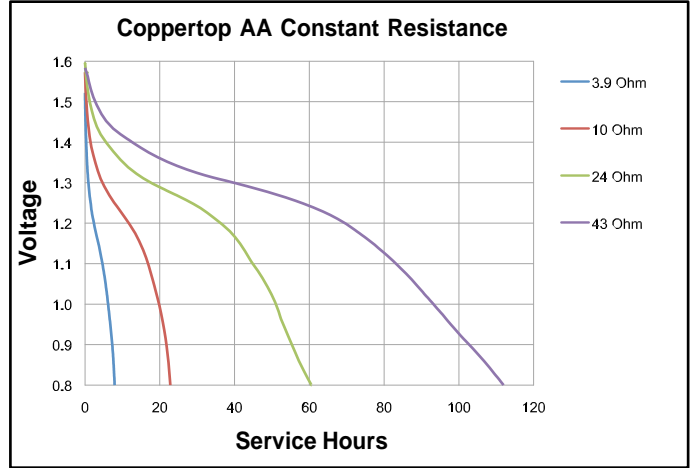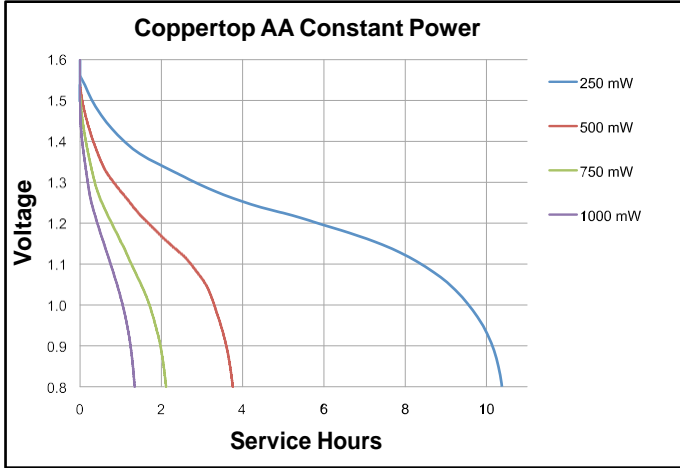

130 Bush Road
Albany, 0632
Telephone: 0800 239 239
www.hamer.co.nz

Delivered capacity is dependent on the applied load, operating temperature and cut-off voltage. Please refer to the charts and discharge data shown for examples of the energy/service life that the battery will provide for various load conditions.