



Dimensions shown are ANSI standards

<b>Nominal voltage</b>	1.5 V
<b>Impedance</b>	128 m-ohm @ 1 kHz
<b>Typical weight</b>	13 g (0.4 oz)
<b>Typical volume</b>	3.5 cm <sup>3</sup> (0.5 in <sup>3</sup> )
<b>Terminals</b>	Flat
<b>Storage temperature range</b>	6°C to 29°C (42°F to 85°F)
<b>Operating temperature range</b>	-20°C to 54°C (-4°F to 130°F)
<b>Designation</b>	<b>ANSI: 24AP</b>

Coppertop AAA Constant Current

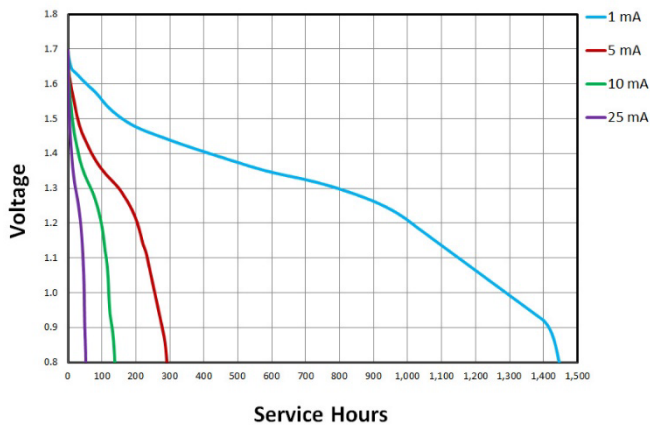

Coppertop AAA Constant Current

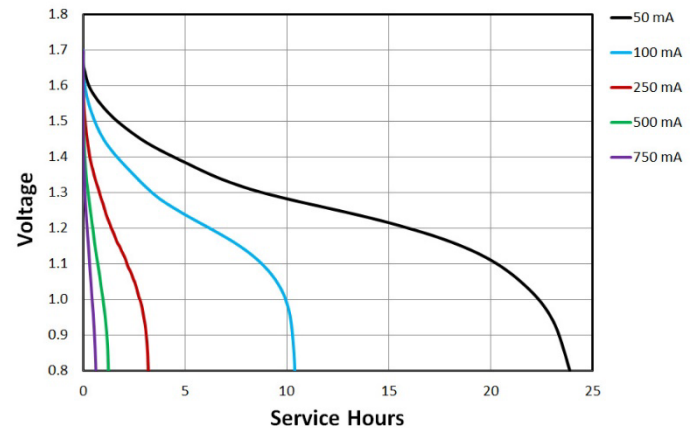







# DURGT2400

## Size: AAA

Alkaline-Manganese Dioxide Battery

Zn/MnO<sub>2</sub>

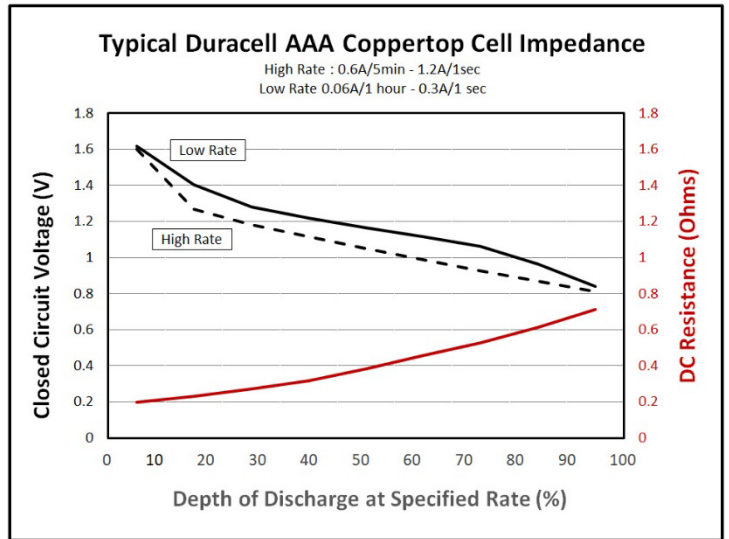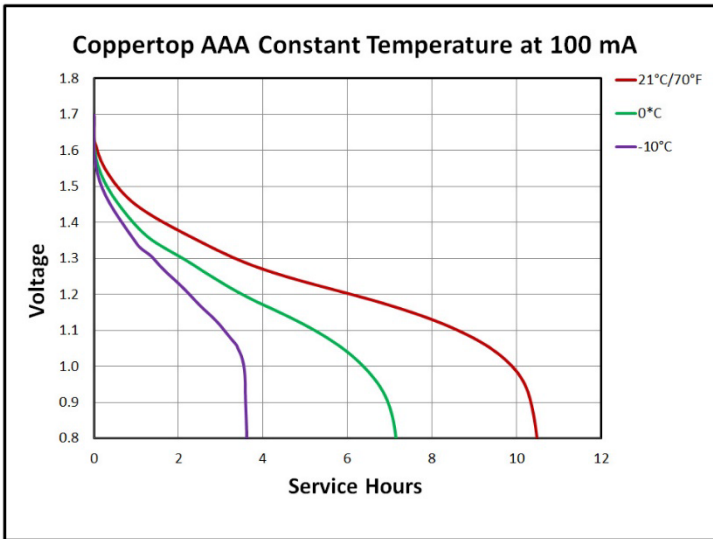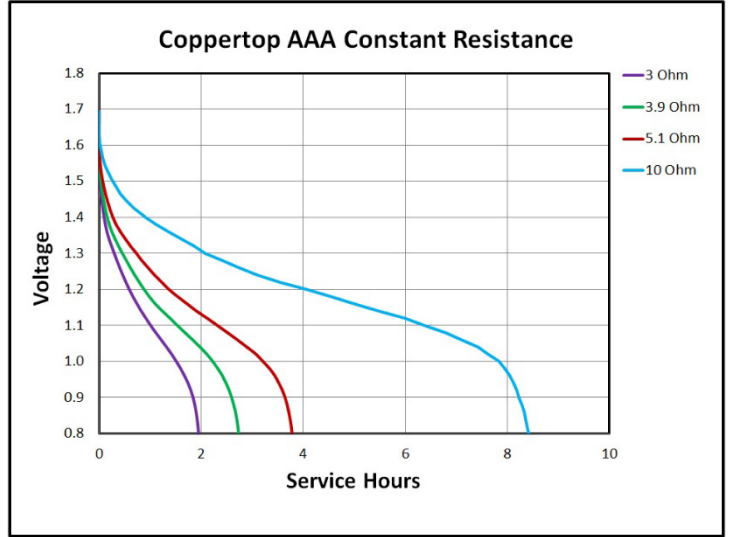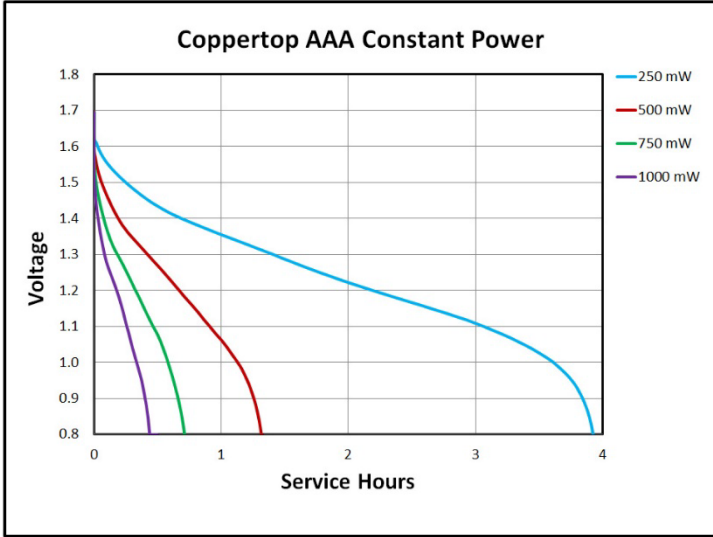

130 Bush Road  
 Albany, 0632  
 Telephone: 0800 239 239  
[www.hamer.co.nz](http://www.hamer.co.nz)

Delivered capacity is dependent on the applied load, operating temperature and cut-off voltage. Please refer to the charts and discharge data shown for examples of the energy/service life that the battery will provide for various load conditions.

LR45213