

DURACELL[®]


ULTRA

MX2500

Size: AAAA

Alkaline-Manganese Dioxide Battery

Zn/MnO₂

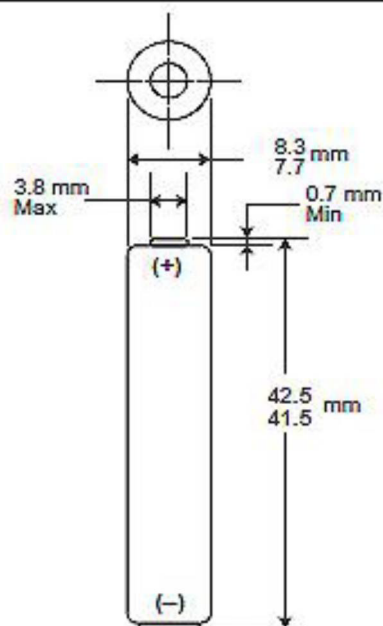


Dimensions shown are ANSI/IEC standards


Nominal Voltage:	1.5 V
Nominal Internal Impedance:	240 m-ohm @ 1KHz
Nominal Weight:	6.0 g
Nominal Volume:	2.02 cm. ³
Terminals:	Flat
Operating Temp. Range:	-20°C to 54°C
NEDA / ANSI:	25A
IEC:	LR8D425

Delivered Energy vs Power Drain

@20°C to 1.0 Volts

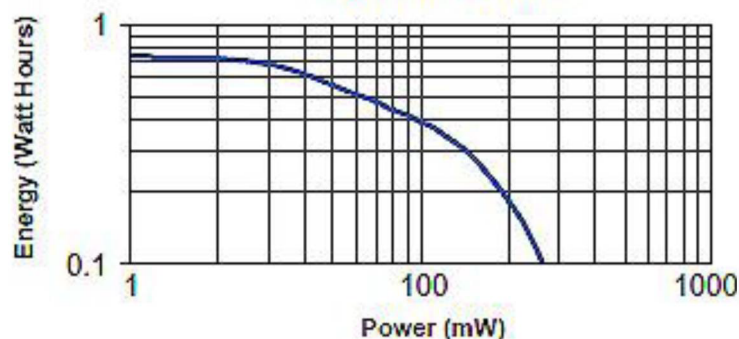




Discharge Characteristics at Various Power Drains

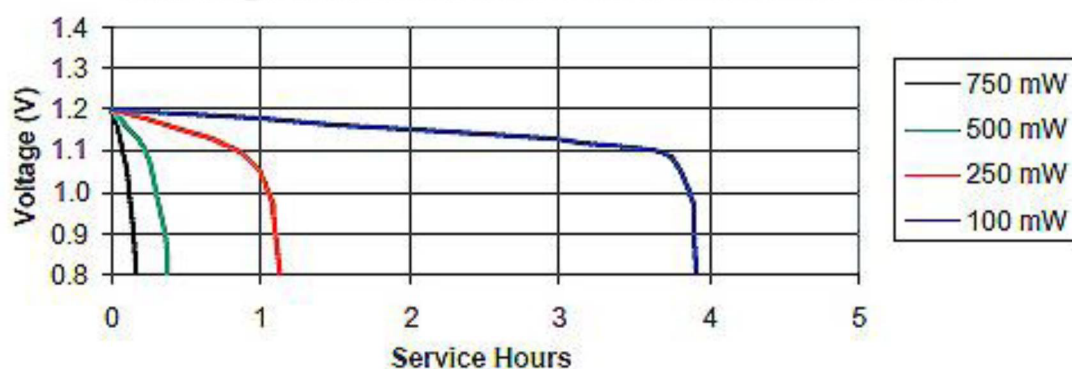

DURACELL[®]

BATTERIES

Delivered capacity is dependent on the applied load, operating temperature and cut-off voltage. Please refer to the charts and discharge data shown for examples of the energy/service life that the battery will provide for various load conditions.

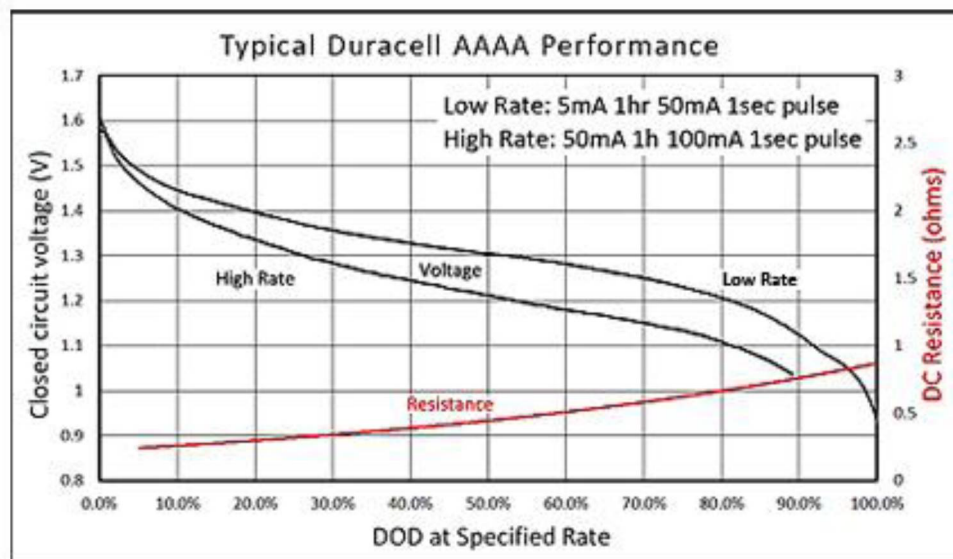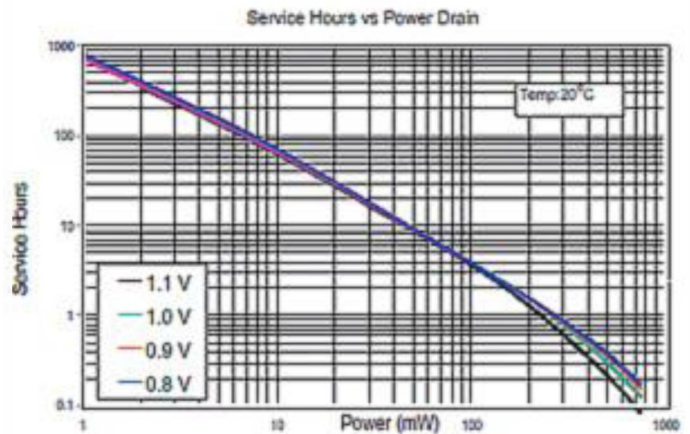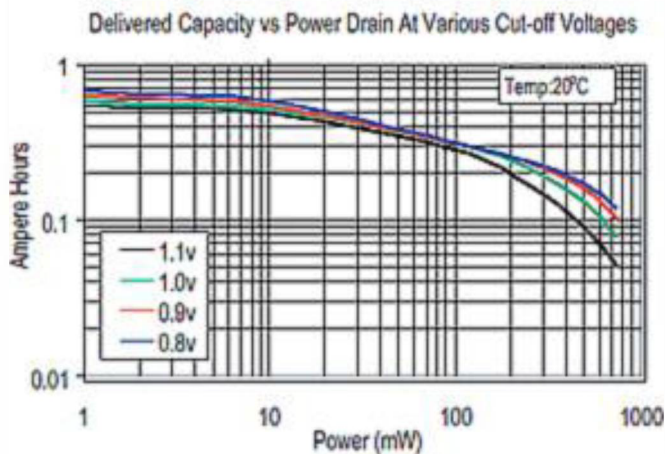

Delivered capacity is dependent on the applied load, operating temperature and cut-off voltage. Please refer to the charts and discharge data shown for examples of the energy/service life that the battery will provide for various load conditions.