


ALKALINE-MANGANESE DIOXIDE BATTERY



Size: 9V (6LR61) DURPX1604

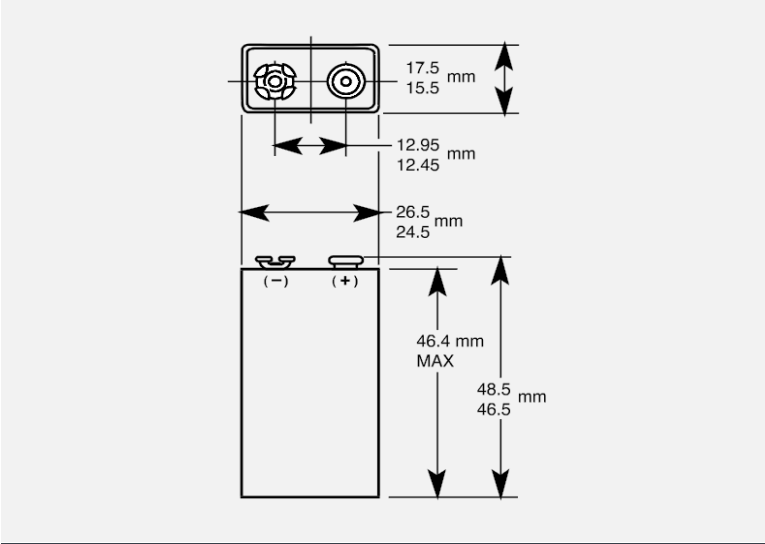

Dimensions shown are IEC standards

KEY FEATURES

- Reliable Performance
- Excellent resistance to corrosion
- Designed to meet all major quality, safety and environmental standards:
 - Safety: IEC 60086-5
 - ANSI C 18.1M, Part-2
 - EU Battery Directive
 - Quality: ISO 14001 and 9001, Duracell World Class Continuous Improvement Program

TYPICAL APPLICATIONS

- Carbon Monoxide Detectors
- Smoke Detectors
- Multimeters
- Medical Devices
- Microphones



130 Bush Road
 Albany, 0632
 Telephone: 0800 239 239
www.hamer.co.nz

ELECTRICAL CHARACTERISTICS

▪ Nominal capacity (2 mA Cont., 5V cut-off)	628 mAh
▪ Typical Voltage (at + 20 °C)	9 V
▪ AC Impedance @ 1kHz	1,692 mΩ

PHYSICAL CHARACTERISTICS

▪ Typical weight	45.3 g (1.6 oz)
▪ Typical volume	22.8 cm ³ (1.4 in ³)
▪ Terminals	Miniature snap

OPERATING & STORAGE CONDITIONS

▪ Operating temperature range	-20°C to 54°C (-4°F to 130°F)
▪ Recommended Storage (storage area should be clean, cool, dry and ventilated)	5°C to 30°C (41°F to 86°F)

Delivered capacity is dependent on the applied load, operating temperature and cut-off voltage. Please refer to the charts and discharge data shown for examples of the energy/service life that the battery will provide for various load conditions.

This data is subject to change. Performance information is typical. Contact Hamer for the latest information.