



SOL SL9726TC / DP -10/42W

IP65 LED DUAL POWER weatherproof batten with selectable colour temperature and power

Application

Commercial or industrial utility applications requiring IP65 and IK08 performance

Design Specifications

- Colour temperature selectable by DIP switch, 3000K /4000K /6000K
- Rounded profile design, robust polycarbonate body and UV stabilized polycarbonate diffuser
- Stainless steel clips & screws, 20mm cable gland entry
- Integral constant current non-dimmable, DUAL POWER LED driver, 10/20 or 20/42 watt models. StandBy options have fixed driver power.
- Product selections compliant to AS/NZS2293
Emergency Lighting & Exit Signs are located in the interior and exterior emergency sections of this web catalogue
- Accessories included - PVC cable glands and suspension brackets. Installation types - Surface mount (standard) or if Suspended (a suspension kit is required).



Performance

Dimmable - **OPTIONAL**

Dimmer Type - **Trailing edge, 1-10V, DALI, DSI**

In Built Sensor - **OPTIONAL**

Sensor Type - **MICROWAVE**

Technical Specification

| Model No. | Description | Input Voltage (V/AC) | Power (W) | Multiple Wattage | Lumens (lm) | CCT (K) |
|----------------|---------------------------------------|----------------------|-----------|------------------|-------------|----------------|
| SL9726/20TC/DP | WEATHERPROOF 642mm IP65 10/20W TC DP | 240 | 20 | 10/20 | 900/1800 | 3000/4000/6000 |
| SL9726/40TC/DP | WEATHERPROOF 1251mm IP65 20/42W TC DP | 240 | 42 | 20/42 | 1800/3700 | 3000/4000/6000 |
| SL9726/20TC/C | WEATHERPROOF 642mm IP65 20W TC / C | 240 | 20 | | 1800 | 3000/4000/6000 |
| SL9726/40TC/C | WEATHERPROOF 1251mm IP65 40W TC / C | 240 | 40 | | 3700 | 3000/4000/6000 |



Technical Specification


| Model No. | CRI | Beam Angle (°) | Body Colour | Dim (mm) |
|----------------|-----|----------------|-------------|--------------------------|
| SL9726/20TC/DP | 80 | 120 | GREY | 642(L) x 118(W) x 77(H) |
| SL9726/40TC/DP | 80 | 120 | GREY | 1251(L) x 118(W) x 77(H) |
| SL9726/20TC/C | 80 | 120 | GREY | 642(L) x 118(W) x 77(H) |
| SL9726/40TC/C | 80 | 120 | GREY | 1251(L) x 118(W) x 77(H) |

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with [SAL Terms and Conditions of sale](#) and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".



Dimensions

(642 x 118 x 77mm), (1251 x 118 x 77mm)

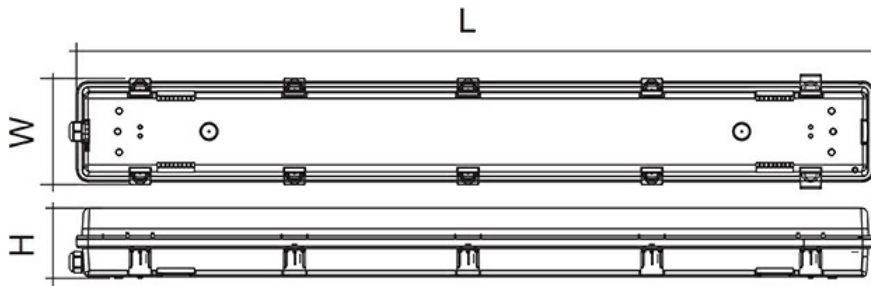

Integrated microwave motion sensor with standBY function

| Model No. | Power (W) | Detection Range | Daylight Threshold | Duration (mins.) | Standby Level | Standby Period |
|---------------|-----------|-----------------|--------------------|------------------|---------------|----------------|
| SL9726/20TC/C | 20 | 100% | Disabled | 5 | 30% | 24 hrs. |
| SL9726/40TC/C | 40 | 100% | Disabled | 5 | 30% | 24 hrs. |






Photometric Data


Photometric Data

Unit: cd C0/C180 — C30/C210 —
 cd C60/C240 — C90/C270 —

SL9726/20TC/DP at 3000K

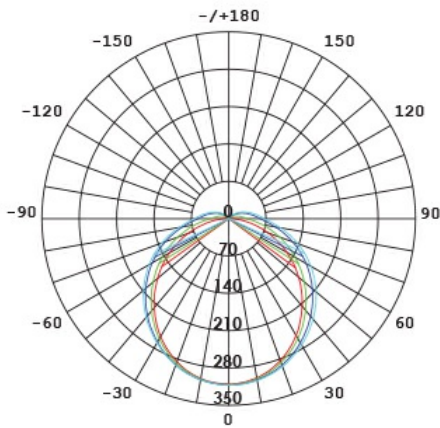

SL9726/40TC/DP at 4000K

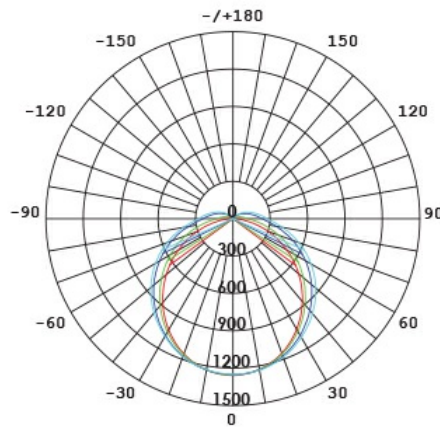

Product Images



Integrated microwave motion sensor with standard function

| Model No. | Power (W) | Default Range | Default Timeout | Default Delay | Standby Power (W) | Standby Time (h) |
|---------------|-----------|---------------|-----------------|---------------|-------------------|------------------|
| SL9726/20TC-C | 20 | 50% | Disabled | 5 | 20% | 24 hrs. |
| SL9726/40TC-C | 40 | 50% | Disabled | 5 | 20% | 24 hrs. |