



## STARGEM III SE70801TC - 15W

15 watt IP65 wall mounted LED floodlight with TC selectable colour temperature

### Application

A stylish solution for residential exterior spaces

### Design Specifications

- Robust adjustable black or white aluminium optical head assembly
- Durable polycarbonate mounting base
- Opal polycarbonate diffuser, beam distribution 100 degree, CCT colour selectable 3000K/4000K/5700K
- High efficiency SMD LED chips, integral non-dimmable LED driver



### Technical Specification

Model No.	Description	Input Voltage (V/AC)	Power (W)	Lumens (lm)	CCT (K)	CRI
SE7080/1TC/BK	LED F/LIGHT 15W IP65 TC BK	240	15	1200/1300/1250	3000/4000/5700	80
SE7080/1TC/WH	LED F/LIGHT 15W IP65 TC WH	240	15	1200/1300/1250	3000/4000/5700	80




### Technical Specification

Model No.	Beam Angle (°)	Body Colour	Mass (kg)
SE7080/1TC/BK	100	BLACK	0.3
SE7080/1TC/WH	100	WHITE	0.3

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with [SAL Terms and Conditions of sale](#) and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".

## Dimensions

SE7080/1TC

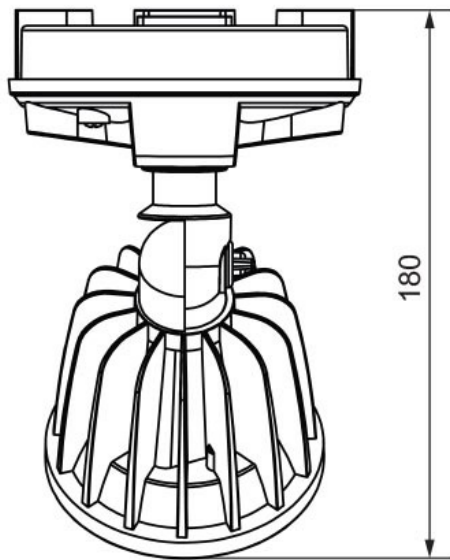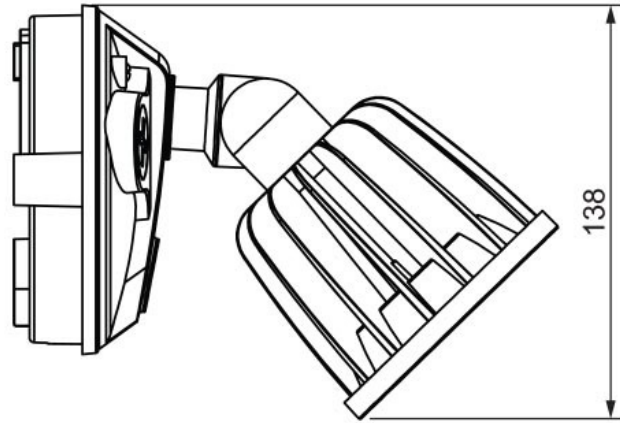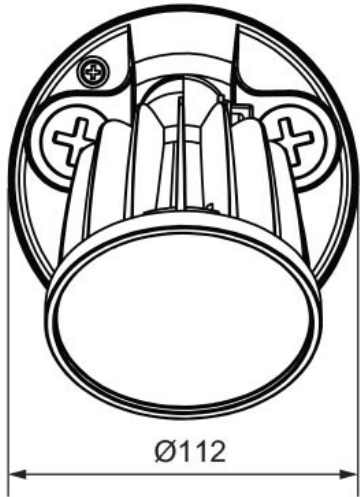



## Product Images

---

