



UFO II SHB25HE - 80/180W

Dimmable 1-10V, IP65 LED multi function highbay or lowbay

Application

Ideal for any commercial or industrial interior space

Design Specifications

- Multi-function highbay or lowbay with optional quick connect CorridorSTANDBY dimming sensor
- Die-cast aluminium body, black powder coat finish
- High efficiency SMD LED optics
- Clear polycarbonate lens, 120° lens
- Integral 1-10V dimmable LED driver with 4KV surge protection, IP65, IK08 rated, complete with flex and plug for easy installation
- Wide selection of optional mounting, optical and control accessories, including a DALI 24V signal converter to 1-10V



Performance

Dimmable - **YES**

Dimmer Type - **1-10V or SAL DALI SIGNAL CONVERTER**

Technical Specification

Model No.	Input Voltage (V/AC)	Power (W)	Lumens (lm)	CCT (K)	Beam Angle (°)	CRI
SHB25HE80CW	240	80	12000	4000	120	80
SHB25HE120CW	240	120	18000	4000	120	80
SHB25HE180CW	240	180	27000	4000	120	80
SHB25HES/RC LM-DALI0108						

Model No.	Body Colour	Dim (mm)	Mass (kg)
SHB25HE80CW	BLACK	320(W) x 252(H)	3.3
SHB25HE120CW	BLACK	320(W) x 252(H)	3.5
SHB25HE180CW	BLACK	320(W) x 267(H)	4
SHB25HES/RC LM-DALI0108			

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with [SAL Terms and Conditions of sale](#) and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".

Dimensions


SHB25 ACCESSORY COMPATIBILITY TABLE - MAY 2020

ACCESSORY	SHB25/120PFD	SHB25/120PFP	SHB25/120PLB	SHB25/120PMR	SHB25/120P90	SHB25/180P60	SHB25/180PFD	SHB25/180PFP	SHB25/180PLB
MODEL									
SHB25/80	YES	YES	YES	YES	YES				
SHB25/120	YES	YES	YES	YES	YES				
SHB25/180						YES	YES	YES	YES
SHB25HE/80	YES		YES	YES					
SHB25HE/120	YES		YES	YES					
SHB25HE/180	YES		YES	YES					


Photometric Data

Unit: cd C0/C180 _____ C90/C270 _____


SHB25HE80 at 5700K

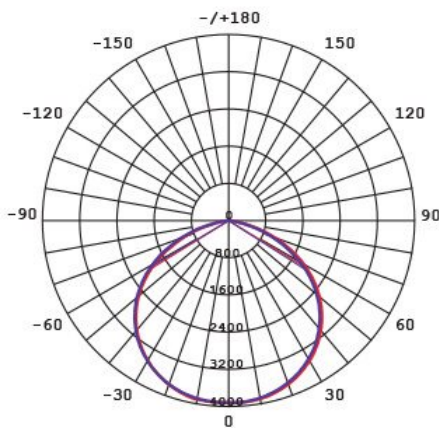

SHB25HE120 at 5700K

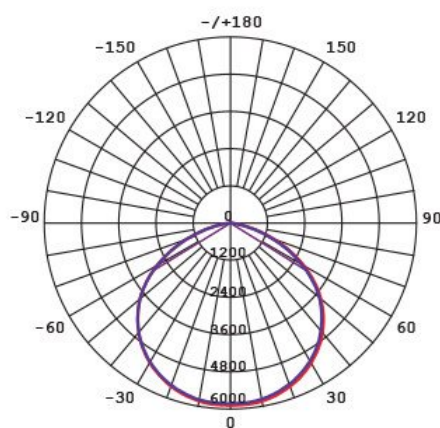

Product Images



Clear polycarbonate reflector
SHB25HE120PPR
SHB25HE180PPR



DALI signal converter
LM-DALI010B



Remote control
SHB25HE/RC



Daylight harvesting sensor
SMS761



Accessories



Bracket for Low Bay
SHB25HE120PLB
SHB25HE180PLB



Metal reflector
SHB25HE120PWR
SHB25HE180PWR



corridorSTANDBY sensor
SHB25HE/CS