



## WIDELINE S9733L - 20/65W

LED wide diffused batten 20-65 watt with selectable colour temperature

### Application

Low profile design suitable for residential apartments and commercial service spaces

### Design Specifications

- Wide pressed steel base with opal polycarbonate diffuser
- Quality white powder coated finish
- High efficiency SMD LED chips, CRI>80, beam distribution 120 degree
- Integral-in constant current non-dimmable LED driver
- Easy selectable colour temperature with an inbuilt DIP switch, CCT 3000K,4000K,5700K
- Large terminal block, easy installation



### Technical Specification

| Model No.    | Description      | Input Voltage (V/AC) | Power (W) | Lumens (lm) | CCT (K)        | CRI |
|--------------|------------------|----------------------|-----------|-------------|----------------|-----|
| S9733L/206TC | LED DIFFUSED BAT | 240                  | 20        | 1800        | 3000/4000/5700 | 80  |
| S9733L/212TC | LED DIFFUSED BAT | 240                  | 38        | 3700        | 3000/4000/5700 | 80  |
| S9733L/215TC | LED DIFFUSED BAT | 240                  | 65        | 5400        | 3000/4000/5700 | 80  |


### Technical Specification

| Model No.    | Beam Angle (°) | Dim (mm)                 | Body Colour |
|--------------|----------------|--------------------------|-------------|
| S9733L/206TC | 120            | 610(L) x 160(W) x 60(H)  | WHITE       |
| S9733L/212TC | 120            | 1144(L) x 160(W) x 60(H) | WHITE       |
| S9733L/215TC | 120            | 1495(L) x 160(W) x 60(H) | WHITE       |

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with [SAL Terms and Conditions of sale](#) and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".

## Dimensions


---

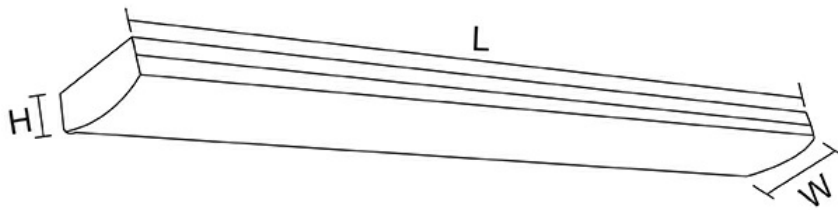

## Photometric Data

Unit: cd C0/C180 — C30/C210 —  
cd C60/C240 — C90/C270 —

**S9733L/206TC at 3000K**

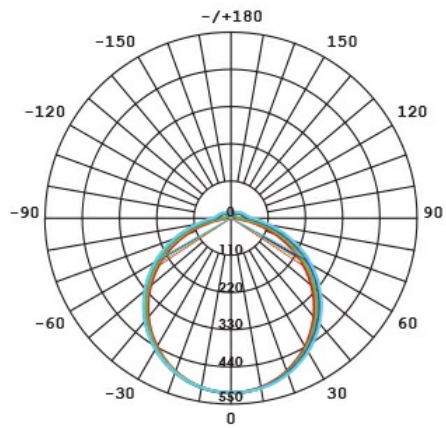

**S9733L/212TC at 5700K**

